

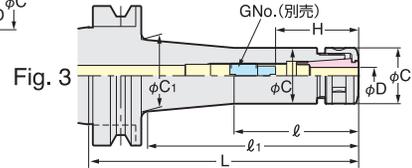


# 日研 2LOCK スリムチャック

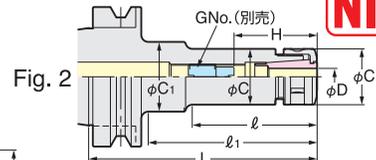

SK  
写真はSK10型です。

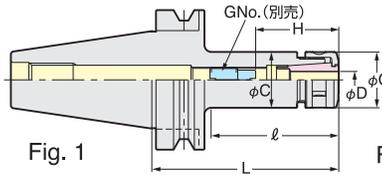

**2LOCK ツーリングは、BT2面拘束主轴で2面拘束ツールとして使用できます。  
もちろん標準のBT主轴でも、BTツールとして使用出来ます。**

Jナット付の場合のCode No.は末尾に“-J”を付加して下さい。(キャップは付属していません。) 例) NBT40-SK10C-90-J  
Jナットの場合、ナット全長が標準ナットに比べて6mm長くなりますので、ご注意下さい。

PAT.

テーパ	Code No.	D	L	l	l <sub>1</sub>	C	C <sub>1</sub>	H	G No. (別売)	重量 (kg)	Fig	SKコレット		
No.30	NBT30-SK 6C- 60	0.7 ~ 6.0	60	33	33	19.5	19.5	26~31	SKG 6- 6HG	0.7	1	SK 6		
	- 90		90	56	65		32			0.7	2			
	-120		120	62	95		32			0.8				
	-SK10C- 45	1.75~10.0	45	22	22	27.5	27.5	33~41	SKG10-10HG	0.8	1	SK10		
	- 60		60	35	35					0.9				
	- 75		75	50	50					1.0				
	- 90		90	65	65					1.0				
	-120		120	95	95					1.1				
	-SK13C- 60	2.75~13.0	60	35	35	33	33	39~51	SKG13-10HG	1.0	1	SK13		
	- 75		75	50	50					1.1				
	- 90		90	65	65					1.1				
	-SK16C- 60	2.75~16.0	60	37	37	40	40	47~52	SKG16-12HGE	1.1	1	SK16		
	- 75		75	52	52			45~52	SKG16-10HG	1.2				
	- 90		90	67	67			45~57	SKG16-12HG	1.2				
	-120		120	97	97					1.3				
	-SK20 - 60*	3.5~20.0	60	37	37	48.5	48.5	65~70	SKG-12S	0.7	1	SK20		
	-SK20C- 75		75	52	52			50~55	SKG20-12HGE	0.9				
	- 90		90	67	67			47~63	SKG20-12HG	1.2				
	-SK25 - 90*	7.5~25.4	90	67	67	55	55	55~75	SKG-12	1.5	1	SK25		
	No.40	NBT40-SK 6C- 60	0.7 ~ 6.0	60	30	30	19.5	19.5	26~31	SKG 6- 6HG	1.0	1	SK 6	
- 90		90		51	60	32		1.1			2			
-120		120		60	90	25		1.4						
-150		150		60	120	25		1.5			3			
-SK10C- 60		1.75~10.0	60	32	32	27.5	27.5	33~41	SKG10-10HG	1.1	1	SK10		
- 75			75	45	45					40			1.2	
- 90			90	48	60					40			1.2	
-120			120	90	90					34.5			1.4	2
-150			150	118	118					34.5			1.6	
-180			180	73	148					39			1.6	3
-200			200	168	168					39			2.0	
-250			250	218	218					39			2.3	
-SK13C- 60		2.75~13.0	60	28	28	33	33	39~51	SKG13-10HG	1.2	1	SK13		
- 75			75	43	43					40			1.3	
- 90			90	58	58					40			1.4	
-120			120	88	88					40			1.6	
-150			150	118	118					40			1.8	3
-180			180	88	148					40			1.8	
-200		200	168	168	40	2.2								
-250		250	218	218	40	2.6								
-SK16C- 60		2.75~16.0	60	32	32	40	40	45~52	SKG16-10HG	1.3	1	SK16		
- 75			75	43	43			45~57	SKG16-12HG	1.5				
- 90			90	58	58			45~57	SKG16-12HG	1.5				
-120			120	88	88			45~57	SKG16-12HG	1.7				
-150			150	118	118			45~57	SKG16-12HG	1.9				
-180			180	148	148			45~57	SKG16-12HG	2.0				
-200			200	168	168			45~57	SKG16-12HG	2.3				
-250			250	218	218			45~57	SKG16-12HG	2.8				
-SK20C- 60		3.5~20.0	60	32	32	48.5	48.5	57~63	SKG20-16HG	1.3	1	SK20		
- 75			75	45	45			47~63	SKG20-18HG	1.4				
- 90	90		60	60	47~63			SKG20-18HG	1.6					
-120	120		90	90	47~63			SKG20-18HG	2.0					
-SK25C- 75	7.5~25.4	75	47	47	55	55	60~65	SKG25-18HGE	1.7	1	SK25			
- 90		90	61	61			60~65	SKG25-18HGD	1.8					
-120		120	91	91			60~70	SKG25-24HG	2.0					