



Q




Fig.1




Fig.2




Fig.3

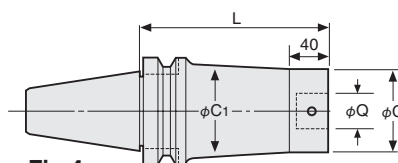


Fig.4

テーパ	Code No.	ドッキング 径Q	L	C	C1	H	H1	接続ボルト No.	Fig.	重量(kg)
No.30	BT30-Q 9- 50	9	50	19	30	20	-	B19	2	0.5
	-Q12- 65	12	65	24	-	40		B12	1	0.5
	-Q16- 50	16	50	31	-	25		B16		0.5
	-Q20- 50	20	50	40	-	26		B20		0.5
	-Q26- 40	26	40	50	45	18	6	B26N	3	0.5
No.40	BT40-Q 9- 80	9	80	19	30	5	-	B19	2	1.2
	- 95N		95			27				1.2
	-Q12- 80	12	80	24	35	12		B12		1.2
	- 110		110			50				1.3
	-Q16- 95	16	95	31	42	22		B16		1.5
	- 125		125			55			1	1.6
	-Q20- 80	20	80	40	50	27		B20		1.5
	- 110		110			60				1.7
	-Q26- 50		50			20				1.1
	- 95	26	95	50	-	65		B26N		1.8
	- 140		140			110			3	2.4
	-Q34- 95	34	95	64	62	68	55	B34		2.2
	- 110		110			83	70			2.6
	-Q42- 95	42	95	83		68	55	B42		2.8
No.50	BT50-Q 9- 110	9	110	19	40	5	-	B19	2	4.1
	- 125N		125			27				4.1
	-Q12- 95	12	95	24	44	12		B12		4.0
	- 125		125			50				4.0
	-Q16- 125N	16	125	31	50	22		B16		4.5
	- 155		155			55			1	4.6
	-Q20- 110	20	110	40	60	27		B20		4.6
	- 125		125			60				4.5
	-Q26- 65		65			27			2	3.7
	- 140	26	140	50	65	47		B26N		5.3
	- 170N		170			112			2	5.4
	-Q34- 140		140			102				5.6
	- 170	34	170	64	80	120		B34		6.5
	- 200		200			150			1	7.1
	-Q42- 125	42	125	83	-	87				6.5
	- 190		190			152				9.1
	-Q42- 225A		225					B42	4	12.9
	- 275A		275							15.6
	- 325A		325							18.3
	- 375A		375							21.0

★全シリーズスルーホール付きです。

★接続ボルト及びレンチは付属しています。

★標準よりL寸法が長い場合、有効ボーリング長MとQ No.をご指定下さい。

