


HSK NC DRILL CHUCK

NIKKEN



■ Compact, High Accuracy and Rigidity

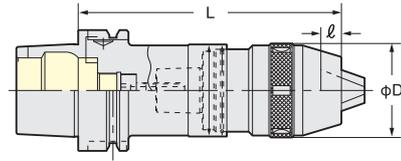

NPU

ℓ : Chucking Length
 NPU 8 : 18.8mm
 NPU13 : 26.5mm

TAPER	Code No	Chucking Dia φ mm	D	L		Weight(kg)
				MIN.	MAX.	
HSK 40A	HSK 40A-NPU 8-114	0.3~8	38	114	121	0.8
	HSK 50A-NPU 8-118	0.3~8	38	118	125	1.0
HSK 50A	-NPU13-135	1~13	48.5	135	147	1.5
	HSK 63A-NPU 8-120	0.3~8	38	120	127	1.3
HSK 63A	-NPU13-135	1~13	48.5	135	147	1.9
	HSK100A-NPU 8-130	0.3~8	38	130	137	2.7
HSK100A	-NPU13-145	1~13	48.5	145	157	3.4

★Wrench is available as an option. The Code No. of wrench is NPU8:NPUL-8, NPU13:NPUL-13
 ★Centre Through Coolant (MAX. 1MPa) is available for NPU13 style only. Please add "C" at the Code No. e.g. HSK63A-NPU13C-135
 ★When it is used for centre through tool coolant holder, MIN. Chucking Dia. is φ6mm.


HSK SIDE LOCK HOLDER

NIKKEN

■ Simple and Rigid




SL

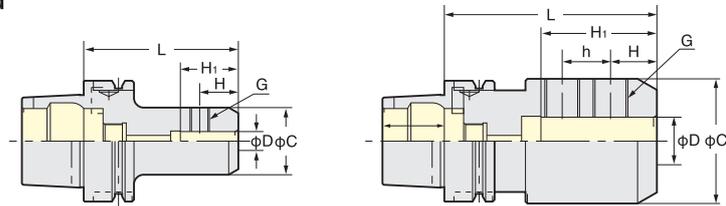

TAPER	Code No	φD	L	C	h	H	H1	G	Weight(kg)	
HSK 63A	HSK 63A-SLS 6- 80	6	80	25	-	18	25	M6	0.9	
	-SLS 8- 80	8		28			30	M8	0.9	
	-SLS10- 80	10		35		20	42	M10	1.0	
	-SLS12- 80	12		42		22.5	46	M12	1.2	
	-SLS16- 80	16	48	24	52	M14	1.3			
	-SLS20- 80	20	52	25	52	M16	1.4			
	-SLS25-110	25	110	65	25	24	70	M18	1.8	
	-SLS32-110	32		72	28		75	M20	2.6	
HSK100A	HSK100A-SLS 6- 80	6	80	25	-	18	25	M6	2.3	
	-SLS 8- 80	8		28			30	M8	2.3	
	-SLS10- 80	10		35		20	42	M10	2.4	
	-SLS12- 80	12		42		22.5	49	M12	2.6	
	-SLS16-100	16	100	48	-	24	52	M14	3.0	
	-SLS20-100	20		52			25	54	M16	3.1
	-SLS25-100	25		65		25	24	65	M18	3.7
	-SLS32-100	32		72		28		68	M20	3.9

★JIS B4005 end mill can be gripped.
 ★The Code No. for ultra heavy duty combination shank end mill is "DM". e.g. HSK100A-DM50,8-120



HSK