


CNC180B, 202B, 260B, 302B, 321B, 401B





External dimensions will be different according to the type of the servo motors. Dimensions with FANUC motor are shown. Please contact with us for CAD data (2D:DXF, 3D:PARASOLID).

CNC180B, CNCZ180B




Powerful Brake
Brake Torque : 303Nm





Air purge function is provided.

CNC202B, CNCZ202B





Powerful Brake
Brake Torque : 303Nm





Air purge function is provided.

CNC260B, CNCZ260B

★ MAX.8 ports of rotary joint can be mounted without changing dimension.
IN ports will be located in left side.

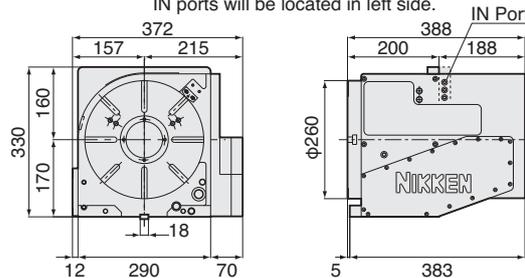



Pneumatic Brake Torque UP
588Nm





For the rotary table with pneumatic brake, air purge function is provided inside the motor cover as standard.

CNC302B, CNCZ302B

★ MAX.8 ports of rotary joint can be mounted without changing dimension.
IN ports will be located in left side.

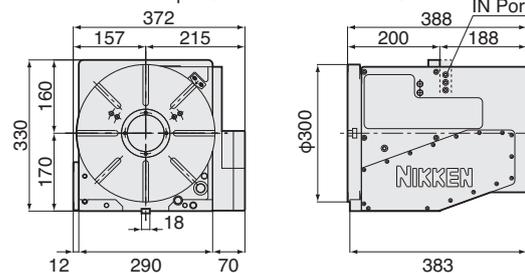




Pneumatic Brake Torque UP
588Nm



For the rotary table with pneumatic brake, air purge function is provided inside the motor cover as standard.

CNC321B, CNCZ321B CNC401B, CNCZ401B

★ Built-in type rotary joint can be mounted on CNC321B & 401B, refer P.54

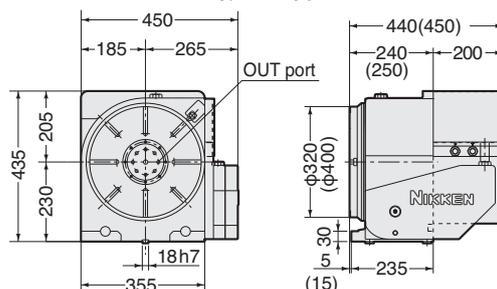

IN ports are located in left side.
() : CNC401B

Photo shows with centre socket (option).

- ★ For accuracy standard, refer P.51, 52
- ★ For fitting metal and stepped guide piece, refer P.22

- ★ For scroll chuck, tailstock and other optional accessories, refer P.49, 50
- ★ a series attachment can be attached for all tables, refer P.46