




CNC100-2W,3W,4W, CNC180-2W,CNC202-2W,CNC260-2W






External dimensions will be different according to the type of the servo motors. Dimensions with FANUC motor or with NIKKEN α 21 controller (α 21 :) are shown. Please contact with us for CAD data (2D:DXF, 3D:PARASOLID).

CNC100-2W






Air purge function is provided inside the motor cover as standard.

CNC100-3W

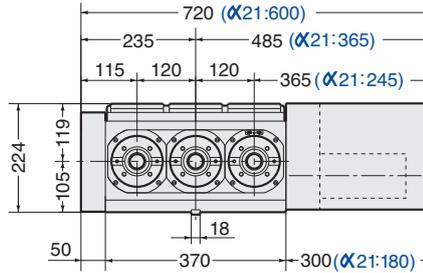


Air purge function is provided inside the motor cover as standard.

CNC100-4W

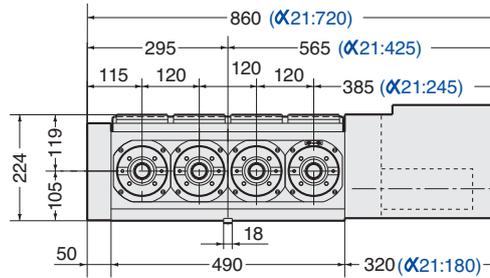


Air purge function is provided inside the motor cover as standard.

CNC180-2W

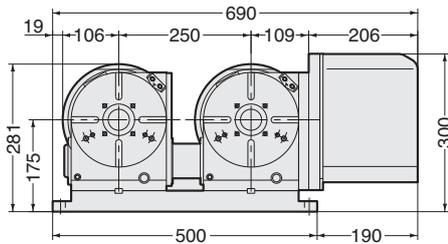

CNC202-2W

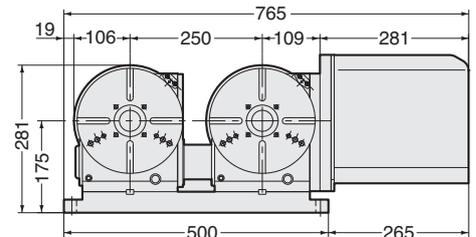


Air purge function is provided inside the motor cover as standard.

Air purge function is provided inside the motor cover as standard.

CNC260-2W

Pneumatic Brake Torque UP 588Nm

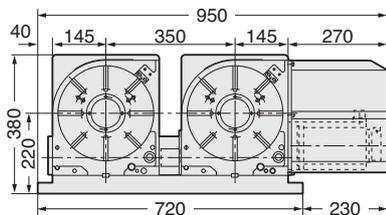

CNC202-2W-L




Accuracy Standard of Multi-Spindle

No.	Measuring Item	Measuring Method	Accuracy
1	Pitch between Spindles		Within ± 0.02 mm from nominal pitch
2	Centre Height of Spindle		Within ± 0.02 mm

For the rotary table with pneumatic brake, air purge function is provided inside the motor cover as standard.

Pneumatic Tailstock for Multi-Spindle

PB-105-2W,-3W,-4W

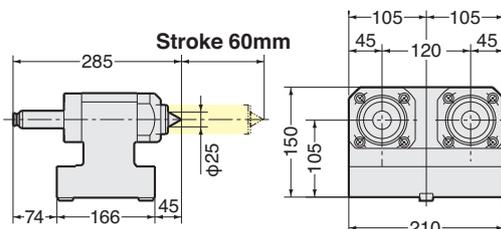

PB-105-4W

PB-105-2W

- ★ MT (Morse Taper) type quill is also available. Please contact us.
- ★ The stroke 60mm can be changed. Please contact us.

- ★ For fitting metal and stepped guide piece, refer [P.22](#)
- ★ For scroll chuck, tailstock and other optional accessories, refer [P.49,50](#)
- ★ α series attachment can be attached for CNC100-2W, 3W, 4W, CNC180-2W and CNC202-2W, refer [P.46](#)