



NSVZ180,300 NSVX400,500

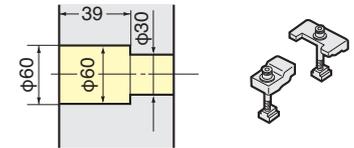

External dimensions will be different according to the type of the servo motors. Dimensions with FANUC motor or with NIKKEN α 21 controller (α 21 :) are shown. Please contact with us for CAD data (2D:DXF, 3D:PARASOLID).

NSVZ180

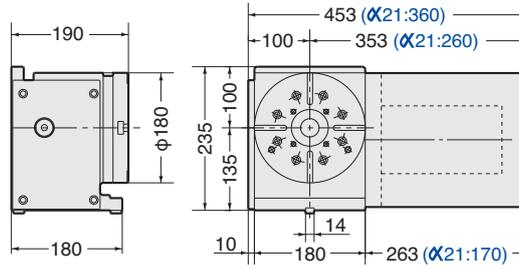

NSVZ300

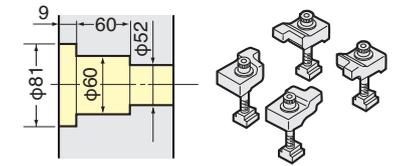
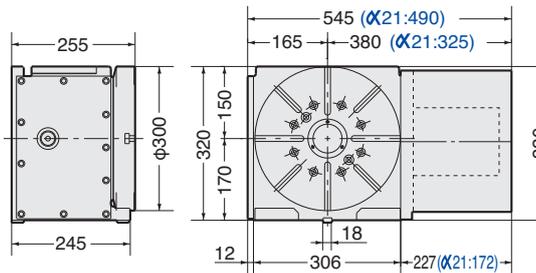


Photo shows with centre socket (option).

NSVX400




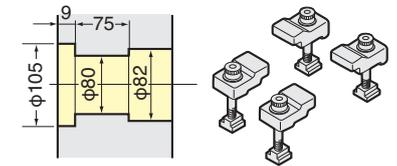


Photo shows with centre socket (option).

NSVX500

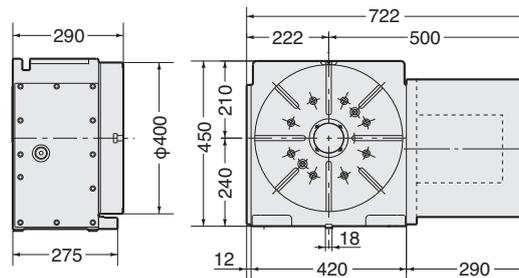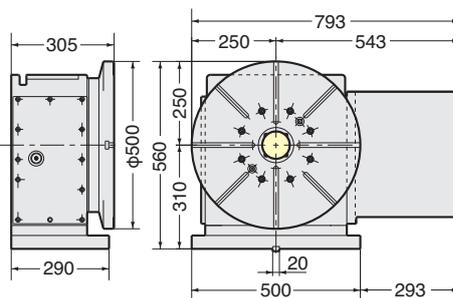

NSVX400T


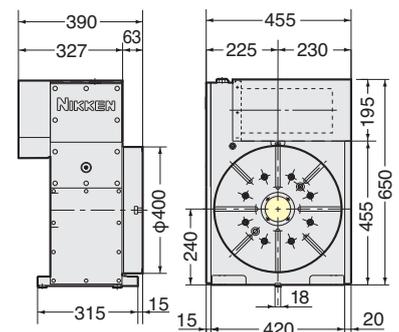


Photo shows only for horizontal use. Please contact us for external dimension.

- ★ For fitting metal and stepped guide piece, refer \Rightarrow P.22
- ★ For scroll chuck, tailstock and other optional accessories, refer \Rightarrow P.49,50



No lift (Three pieces of Hirth Coupling)
Three pieces of 360 division precision hirth coupling ensures smooth and fast indexing without table lifting.

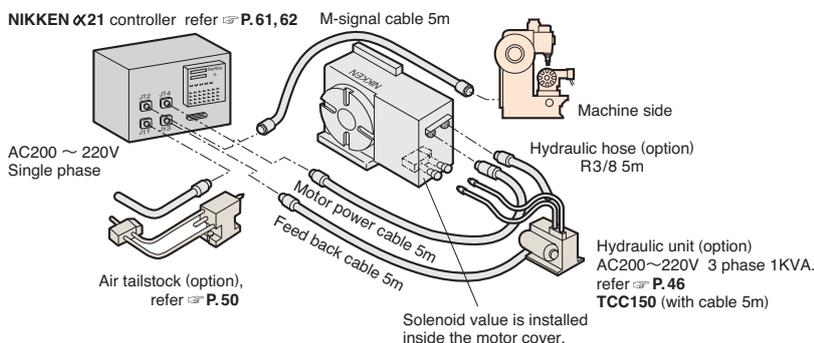