

日研 高速回転用スリムチャック(ストレート型)



MAX.40,000min⁻¹ & G2.5



SK-P


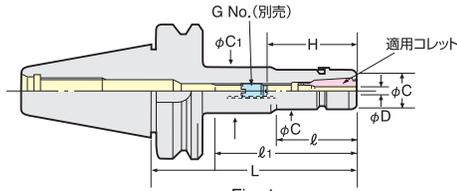


Fig. 1



Jナット付の場合のCode No.は末尾に“-J”を付加して下さい。(キャップは付属していません。) 例)BT40-SK10-90P-J
 Jナットの場合、ナット全長が標準ナットに比べて6mm長くなりますので、ご注意ください。

PAT.

テーパ	Code No.	D	L	ℓ	ℓ ₁	C	C ₁	H	G No. (別売)	最高回転数 (min ⁻¹)	SKコレット	重量 (kg)	
No.30	BT30-SK 6- 60P	0.7 ~ 6.0	60	33	33	19.5	19.5	21~35	SKG- 8	40,000	SK 6	0.7	
	- 90P		90	56	65		32					0.7	
	-120P		120	62	95		32					0.8	
	-SK10- 45P	1.75~10.0	45	22	22	27.5	27.5	30~50	SKG-12S		SK10	0.8	
	- 60P		60	35	35							0.9	
	- 75P		75	50	50							1.0	
	- 90P		90	65	65							1.0	
	-120P	120	95	95	1.1								
	-SK13- 60P	2.75~13.0	60	35	35	33	33	31~50	SKG-15		SK13	1.0	
	- 75P		75	50	50							1.1	
	- 90P		90	65	65							1.1	
	-120P		120	95	95							1.2	
	-SK16- 60P	2.75~16.0	60	37	37	40	40	45~60	SKG-12L		SK16	1.1	
	- 75P		75	52	52			45~65				1.2	
	- 90P		90	67	67			40~70				1.2	
	-120P		120	97	97			SKG-18L				1.3	
-SK20- 60P	3.5~20.0	60	37	37	48.5	48.5	65~70	SKG-12S	SK20	0.7			
- 75P		75	52	52			70~75			0.9			
- 90P		90	67	67			65~75			1.2			
-SK25- 90P	7.5~25.4	90	67	67	55	55	55~75	SKG-12	SK25	1.5			
No.40	BT40-SK 6- 60P	0.7 ~ 6.0	60	30	30	19.5	19.5	21~35	SKG- 8	30,000	SK 6	1.0	
	- 90P		90	51	60		32					1.1	
	-120P		120	60	90		25					1.4	
	-150P		150	60	120		39					1.5	
	-SK10- 60P	1.75~10.0	60	32	32	27.5	27.5	30~50	SKG-12L		SK10	1.1	
	- 75P		75	45	45							34.5	1.2
	- 90P		90	48	60							39	1.2
	-120P		120	90	90							1.4	
	-150P		150	73	118							1.6	
	-180P		180	118	148							1.6	
	-SK13- 60P	2.75~13.0	60	28	28	33	33	31~65	SKG-15		SK13	1.2	
	- 75P		75	43	43							1.3	
	- 90P		90	58	58							1.4	
	-120P		120	88	88							1.6	
	-150P		150	88	118							1.8	
	-180P		180	148	148							1.8	
	-SK16- 60P	2.75~16.0	60	32	32	40	40	50~65	SKG-18S		SK16	1.3	
	- 75P		75	43	43			40~67				1.4	
	- 90P		90	58	58			40~70				SKG-18L	1.5
	-120P		120	88	88								1.7
	-150P		150	118	118								1.9
	-180P		180	148	148								2.0
	-SK20- 60P	3.5~20.0	60	32	32	48.5	48.5	47~60	SKG-22		SK20	1.3	
	- 75P		75	45	45			47~70				1.4	
- 90P	90		60	60	47~80			1.6					
-120P	120		90	90	2.0								
-SK25- 75P	7.5~25.4	75	47	47	55	55	55~75	SKG-12	SK25	1.7			
- 90P		90	61	61			55~85			1.8			
-120P		120	91	91			2.0						